


## Standard Type

Nylon fingers give even pressure on gland for good seal.  
Two piece gland insert permits wide range of cable diameters.

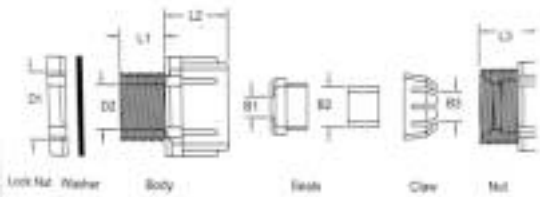


Part Number	Hole Dia. D1	D2	B2	B3	L1	L2	L3	Cable Dia. Range
23-PGA16	16	10.5	7	10	12	17	16.5	5-9
23-PGA20	20	13.7	9	13	13	19	19.5	8-13
23-PGA25	25	18.5	11	17	13	22	21.0	10-18

UL Approved Nylon 6/6 Black PG Thread Pitch 1.5mm

## Strain Relief Type

Support for cable in portable situations.

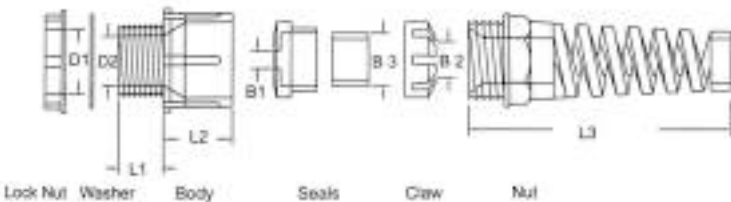


Part Number	Hole Dia. D1	D2	B2	B3	L1	L2	L3	Cable Dia. Range
23-PGA16SR	16	10.5	7	10	12	17	62	5-9
23-PGA20SR	20	13.7	9	13	13	19	78	8-13

UL Approved Nylon 6/6 Black PG Thread Pitch 1.5mm

## Right Angle Cable Gland

One piece body/claw speeds up assembly.

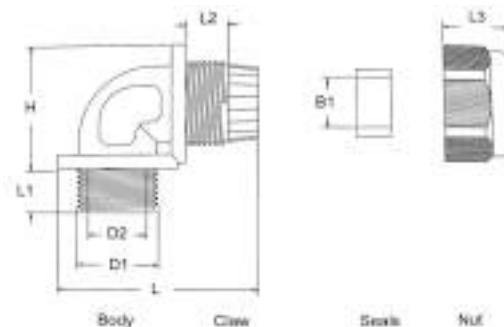


## NPT Thread

Part Number	Hole Dia. D1	NPT Thread	D2	B1	L1	L2	L3	L	H	Cable Dia. Range mm
23-NPTA16	16.6	3/8"	12	9.3	11.7	9.9	16.7	48.5	30.0	5 - 9
23-NPTA21	21.0	1/2"	14	13.0	14.7	11.8	18.4	51.8	31.2	10 - 13
23-NPTA26	26.3	3/4"	19.2	16.4	14.8	12.6	22.3	64.5	41.6	13 - 16
23-NPTA42	41.7	1 ..."	31.6	29.3	18.8	16.3	31.0	85.0	53.0	22 - 29

## Metric Integral Claw Type

One piece body/claw speeds up assembly.  
UR E186042.

**IP68**

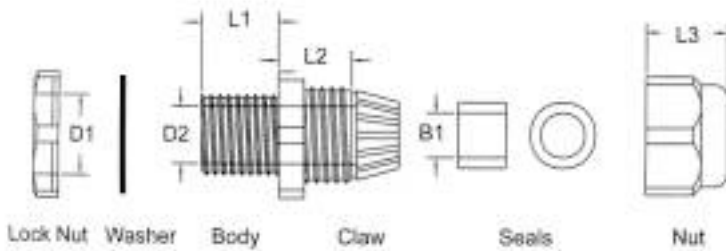


**Metric Thread** UL Approved Nylon 6/6 94V-2 Black

Part Number	Hole Dia. D1	D2	B1	L1	L2	L3	Cable Dia. Range mm
23-MAG12	12	8.3	6.0	7.9	12.1	13.3	3-6.5
23-MAG16	16	10.9	9.6	15.7	14.4	16.7	5-10
23-MAG20	20	14.8	12.9	15.0	19.5	18.4	10-14
23-MAG25	25	18.6	16.4	15.0	18.7	22.3	13-18

## Metric Strain Relief Type

One piece body/claw speeds up assembly.

**IP68**

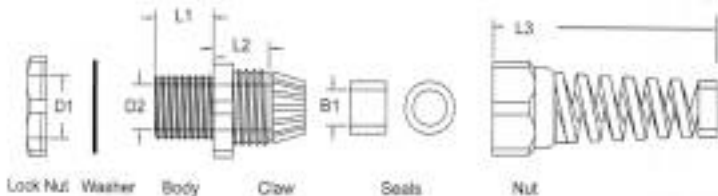

**Metric Thread** UL Approved Nylon 6/6 94V-2 Black

Part Number	Hole Dia. D1	D2	B1	L1	L2	L3	Cable Dia. Range mm
23-MAG12SR	12	8.3	6.0	7.9	12.1	53.3	3-6.5
23-MAG16SR	16	10.9	9.6	14.4	14.4	74.9	5-10
23-MAG20SR	20	14.8	12.9	12.8	19.5	96.2	10-14
23-MAG25SR	25	18.6	16.5	13.9	19.5	111.2	13-18

## Metric Reduction Fittings

Switch from large metric gland to small one.  
Thread Length 8mm.

Part Number	D1	D2
23-M2012	M20	M12
23-M2016	M20	M16
23-M2516	M25	M16
23-M2520	M25	M20



Material :

UL Approved Nylon 6/6 94V-2 Black

## Metric Screw Plugs



Part No.	A	B	C	D
22-MSP12	M12	15.0	10.0	6.0
22-MSP16	M16	20.0	10.5	6.0
22-MSP20	M20	24.0	10.5	6.0
22-MSP25	M25	29.7	12.8	7.8
22-MSP32	M32	36.6	13.3	7.8
22-MSP40	M40	45.8	13.4	7.8
22-MSP50	M50	55.5	16.2	9.8