


IEC appliance outlet F, snap-in mounting, front side, IDC terminals

new

Arrangement "cross"
(wires cross to pin axis)Arrangement "along"
(wires along to pin axis)Arrangement "along", view from rear side
(wires along to pin axis)**Description**

- Panel Mount:
Snap-in version, from front side
- Connector, Pin temperature 70 °C, Protection class I
- IDC terminals

Approvals

- VDE License Number: 40021750
- UL License Number: E103791

Characteristics

- IDC technology for efficient and cost saving mounting
- Protection cover can be used as "wire press"
- Live contact available as IDC, solder or quick connect terminal
- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- Screw-on mounting
- Live contact as quick connect terminal 4.8 x 0.8 mm
- UL approval for AWG 16; Versions for other wire gauges
- Protection class II, 70°C

References

[General Product Information](#)

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	IDC terminals
Panel Thickness s	Snap-in 0.8/ 1/ 1.2/ 1.5/ 2/ 2.5 mm (other on request)
Material: Housing	Thermoplastic, black, UL 94V-0




Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	---

Dimensions


Version "cross" (wires cross to pin axis)
L/N/PE: IDC terminals

Length 33 mm

Version "along" (wires along to pin axis)
L/N/PE: IDC terminals

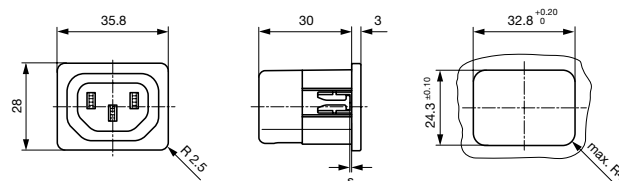


Version "cross" (wires cross to pin axis)
 N/PE: IDC terminals, L: quick connect or solder terminal

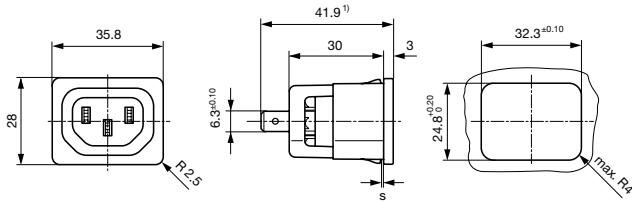

1) Other options:
 Quick connect terminal 4.8x0.8: 40.3 mm
 Solder terminal: 40.9 mm

Version "along" (wires along to pin axis)
 N/PE: IDC terminals, L: quick connect or solder terminal

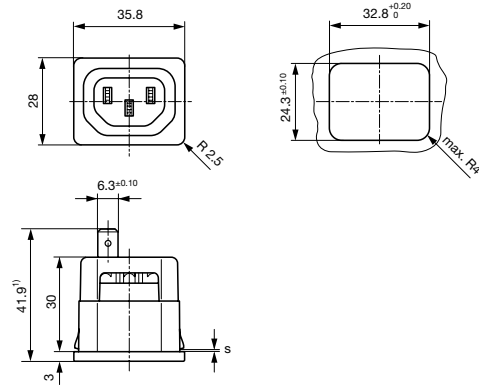


1) Other options:
 Quick connect terminal 4.8x0.8: 40.3 mm
 Solder terminal: 40.9 mm

Mounting instructions

Use the cover or an assembly tool, to push the wires into the IDC terminals. The assembly force depends on the wire used and may require as much as 900 N. Press the wires into the IDC terminals until the wires touch with the plastic socket of the 6610 when using a tool. When using the cover be sure that it is properly mounted. The outer diameter of the wire (including insulation) must not exceed 3.3 mm. The correct installation of the wires is essential for proper function of the 6610 in the end equipment.

The following dimensions are recommended when using an assembly tool:

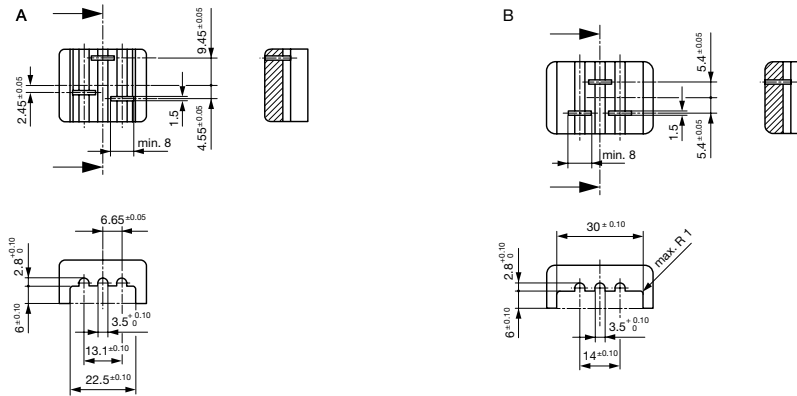

A) Version "cross"
 B) Version "along"

Variants

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Alignment ¹⁾	Conductor cross section	Panel Thickness s [mm]	Terminal type live contact	Order Number
along	1.0 - 1.5 mm ²	1	IDC terminals	6610.3012
along	1.0 - 1.5 mm ²	1.2	IDC terminals	6610.3013
along	1.0 - 1.5 mm ²	1.5	IDC terminals	6610.3014
along	1.0 - 1.5 mm ²	2	IDC terminals	6610.3015
along	1.0 - 1.5 mm ²	2.5	IDC terminals	6610.3016
along	1.0 - 1.5 mm ²	3	IDC terminals	6610.3017
along	2.5 mm ² / 12 AWG	0.8	IDC terminals	6610.1011
along	2.5 mm ² / 12 AWG	1	IDC terminals	6610.1012
along	2.5 mm ² / 12 AWG	1.2	IDC terminals	6610.1013
along	2.5 mm ² / 12 AWG	1.5	IDC terminals	6610.1014
along	2.5 mm ² / 12 AWG	2	IDC terminals	6610.1015

Alignment ¹⁾	Conductor cross section	Panel Thickness [mm]	Terminal type live contacts	Order Number
along	2.5 mm ² / 12 AWG	2.5	IDC terminals	6610.1016
along	2.5 mm ² / 12 AWG	3	IDC terminals	6610.1017
along	2.5 mm ² / 12 AWG	1.5	Quick connect terminal 6.3 x 0.8	6610.1254
along	2.5 mm ² / 12 AWG	1	Solder	6610.1152
along	2.5 mm ² / 12 AWG	1.5	Solder	6610.1154
cross	1.0 - 1.5 mm ²	1	IDC terminals	6610.4012
cross	1.0 - 1.5 mm ²	1.2	IDC terminals	6610.4013
cross	1.0 - 1.5 mm ²	1.5	IDC terminals	6610.4014
cross	1.0 - 1.5 mm ²	2	IDC terminals	6610.4015
cross	1.0 - 1.5 mm ²	2.5	IDC terminals	6610.4016
cross	1.0 - 1.5 mm ²	3	IDC terminals	6610.4017
cross	2.5 mm ² / 12 AWG	1	IDC terminals	6610.2012
cross	2.5 mm ² / 12 AWG	1.2	IDC terminals	6610.2013
cross	2.5 mm ² / 12 AWG	1.5	IDC terminals	6610.2014
cross	2.5 mm ² / 12 AWG	2	IDC terminals	6610.2015
cross	2.5 mm ² / 12 AWG	2.5	IDC terminals	6610.2016
cross	2.5 mm ² / 12 AWG	3	IDC terminals	6610.2017
cross	2.5 mm ² / 12 AWG	1.5	Quick connect terminal 6.3 x 0.8	6610.2254
cross	2.5 mm ² / 12 AWG	1.5	Solder	6610.2154

Articles for 1-1.5mm² only with ENEC approval Outer diameter of wire (including insulation) max. 3.3 mm ¹⁾ The alignment describes whether the wires are along or across to the connector pin axis

Packaging unit 300 Pcs

Accessory

Description



Cord retaining kits
Cord retaining strain relieve

Flat head, E	4700.0005
Flat head, G	4700.0007

Mating Inlets/Plugs

Category / Description

Interconnection Cord



Power Cord with IEC Appliance Plug E, angled, 70°C	0607
Power Cord with IEC Appliance Plug E, angled, 70°C	0608
Power Cord with IEC Appliance Plug E, straight, 70°C	0609
Power Cord with IEC Appliance Plug G, angled, 70°C	607B
Power Cord with IEC Appliance Plug G, angled, 70°C	608B
Power Cord with IEC Appliance Plug G, straight, 70°C	609B

Plug Connector



IEC plug connector E, rewirable, straight, max. cable diameter 8.5 mm	4732
IEC plug connector E, rewirable, angled, max. cable diameter 10 mm	4733
IEC plug connector E, rewirable, straight, max. cable diameter 10 mm	4735
IEC plug connector E, rewirable, angled, max. cable diameter 10 mm	4736
IEC plug connector E, rewirable, straight	9009
IEC plug connector E, rewirable, angled	9013
IEC plug connector E, rewirable, angled	P685